

# Döllken Product Information

## CSL 70 Clip skirting for clipping in of strips of laminated flooring



- for clipping in of flooring strips 6-11 mm
- the flexible lip seals conceal unevenness of floors and walls
- In universal colours matching to all kind of flooring patterns
- simple and concealed fixing
- with internal, and external corners, connectors and end caps for later clipping on




# Professional Installation System

## Döllken CSL 70




System skirting CSL 70 for an elegant transition from floor to wall for laminated floorings and system parquet or other floor coverings with thickness of 6 -11 mm (if required with underlay)

### Dimensions and Accessories

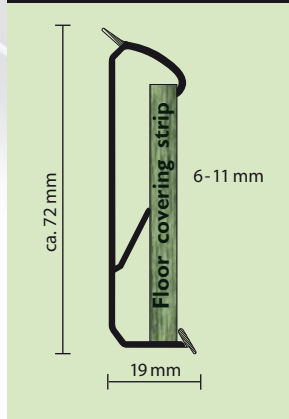

1 sales unit = 10 x 2,5 m

Accessories:  
Internal Corners  
External Corners  
End Caps  
Connectors

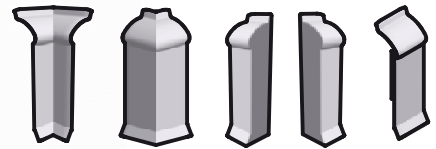

### Specification

System skirting, made from hard wearing vinyl, for clipping in of strips of laminated flooring, with flexible lip seals.

Height: approx. 72 mm

Edge overlap: approx. 19 mm

Colour: ...

Product: Döllken CSL 70

Installation: Professional installation in accordance with the manufacturer's instructions. Corners with matching elements, ends with matching end caps.

Fixing: We recommend glueing with hotmelt adhesive HKS 18/300 in accordance with separate Döllken fitting instructions

The chosen fastening system for the base profile depends on the soundness of the wall structure, which should be checked for appropriate quality and rigidity by the fitter. The profile is to be cut and be fixed at the wall sitting on the flooring. The floor covering strips (approx. 58 mm broad) are to be cut and clipped into the skirting. Corners with molded parts (corners) and ends with end caps to be clipped on after mounting the skirting and strips.

### Shades and colours



Your Döllken distributor