

NEW:
Slip-resistant
(min. R10) and
self-adhesive!

Stair nosings „TKNG“

The next step in the field of modern stair nosing

The new „Next Generation“ stair nosing range is suitable as a connecting and tread edge for design coverings, CV and linoleum with subfloors made of wood, stone or concrete. The slim design in modern colours creates a visual highlight on every step - even in the dark, thanks to the new standard phosphorescent/ afterglow edging. Of course, the „TKNG“ stair nosing series is free of harmful plasticisers in accordance with the REACH regulation and has slip resistance class R 10.

The new „TKNG“ stair nosing programme is characterised by:

- Slim appearance
- Slip-resistant due to structured tread surface
- (slip resistance class min. R10)
- Phosphorescent/ luminescent edge
- Protects against falls in the dark
- Particularly hard-wearing
- Environmentally friendly and harmless to health




Do you have questions about
the product or need tips from
our professionals? Then simply
contact us:
Hotline: +49 3643 4170 711
or via our app!

**Döllken
Profiles**

we create.
we innovate.

SURTECO GROUP

Advantages at a glance

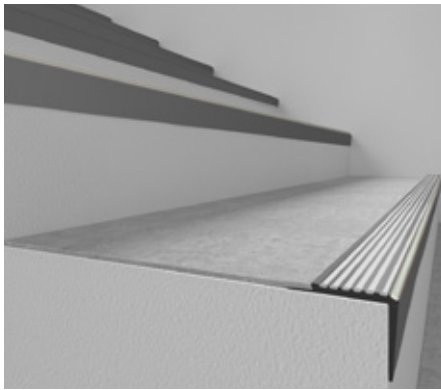

NEW!
self-
adhesive*

The „TKNG“ stair nosings are made of elastic polyblend based on PVC. The ingredients are REACH-compliant. They are also certified according to slip **resistance class R 10**.

The **standard phosphorescent/ phosphorescent** edge reduces accidents in the area of the stairs. A visual highlight even in the dark.

Selected* stair nosings from the TKNG range are now also available in **self-adhesive** versions!


* TKNG A40 light grey, dark grey, black, TKNG A65 light grey, dark grey, black, others on request!

Colours


Base colour	0138	0146	1160
Profile	light grey	dark grey	aluminium
Groove colour	0146	0138	0146
	dark grey	light grey	dark grey
Base colour	0110	0110	1245
Profile	black	black	champagne
Groove colour	0138	0110	0146
	light grey	black	dark grey

Technical data


TKNG A 40

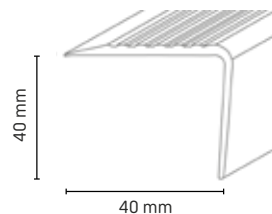


TKNG A 45




TKNG A 65




TKNG A 40 sk




TKNG A 45 sk




TKNG A 65 sk



TKNG 2,5 40



TKNG 3,5 40



1 VE = 10 x 2,5 m

Processing recommendation



Döllken Skirting scissors

Product features



New installation videos at www.doellken-profiles.com, in the Doellken app or on YouTube.

Döllken Profiles GmbH
Industriestraße 1
59199 Bönen
Follow us on

T: +49 3643 4170 711
F: +49 3643 4170 330
info@doellken-profiles.com
www.doellken-profiles.com