

D 60 life TOP



The cored skirting is designed especially for gluing in designer floor strips. The designer floor covering finish may be continued into the skirting with the D 60 life Top to create a harmonious transition with matching floor to wall finish. The inside and outside corners may be accurately and seamlessly punched all-round and the installation will be invisible if UZIN adhesive strip or Döllken hot melt adhesive are used. The D 60 is suited for designer coverings up to 4.5 mm thick.

Advantages at a glance:

- flexible lips to wall and floor / no re-jointing required
- seamless outside and accurate inside corners using the punch
- interesting optical effect
- highly flexible skirting
- fast laying without cross-cut saw


Any questions about the product or would you like tips by our pros? Then simply contact us:
Hotline: +49 3643/ 4170-222
or via our App!

Döllken
Profiles

we create.
we innovate.

SURTECO GROUP

Product information

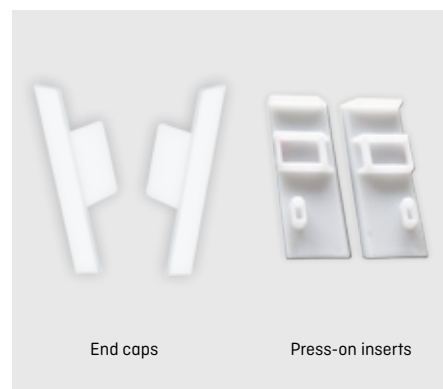

The D 60 life TOP comprises an HDF core wrapped in a chlorine-free PP/TPE based Polyblend with flexible soft lips. We recommend installation by gluing with the UZIN Toptac 35 application strip that perfectly matches the skirting or by using Döllken hot melt adhesive.

Use the strip cutter to produce accurately cut floor cover strips. Glue in PVC and CV coverings using UZIN Contact 40.


The end caps are available as matching accessories in various colours. Punching the designer covering strips is child's play with the practical press-on inserts.

Colours C 60 life TOP



* colours available for the accessories


Technical data

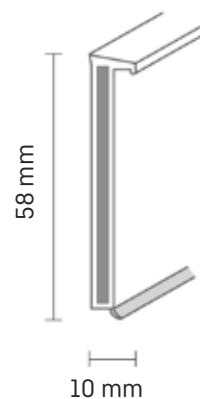

Suited for designer coverings up to 4.5 mm thick.

1 sales unit = 20 x 5.15 m

Processing recommendation

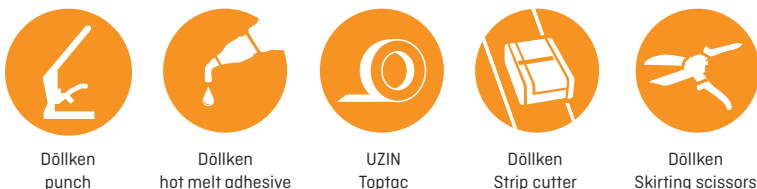

Note our installation instructions in this respect! Find them at: www.doellken-profiles.com or in the Doellken App



New installation videos at www.doellken-profiles.com, in the Doellken App or on YouTube.

Döllken Profiles GmbH
Stangenallee 3
99428 Nohra b. Weimar
Follow us on

T: +49 3643 4170 711
F: +49 3643 4170 330
info@doellken-profiles.com
www.doellken-profiles.com