

NEW

# Stair renovation made simple –


Repair angle for a solid foundation.  
TKNG stair edging for a flawless finish.

## Repair angle

Repair angles provide a fast and reliable way to stabilise damaged stair treads in residential and commercial applications.

They reinforce cracks, chips and uneven areas, restore safe use of the stairs and extend the lifespan of coverings and stair edging profiles. Once installed and levelled with filler compound, they create a solid base for new stair edging profiles or floor coverings.

- ✓ Suitable for renovating concrete, stone and wooden stairs
- ✓ New shape, new function – ideal for safely bonding coverings to risers
- ✓ High load capacity
- ✓ Galvanised surface protects against corrosion
- ✓ Simple, quick and clean to install
- ✓ Long-lasting protection for stair edges and corners
- ✓ Easy installation thanks to pre-drilled holes for nails and screws

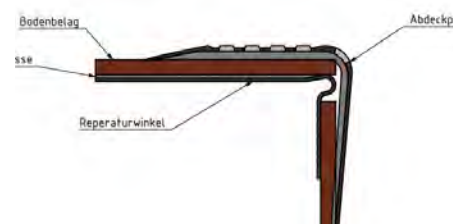

Watch the installation video!



**Döllken Profiles**

SURTECO GROUP

# „TKNG“ Stair Edging Profiles

Slip-resistant –  
certified R10 (also  
self-adhesive  
available!)

The “Next Generation” (TKNG) stair edging system is the stylish finishing solution for LVT, CV and linoleum on wood, stone and concrete stairs. Its slim design, modern colours and glow-in-the-dark edge ensure both safety and visual appeal. TKNG is REACH-compliant and certified to slip-resistance class R10.



Scan the QR code & watch  
the installation video!




## What makes the TKNG stair edging system stand out:


- Modern, slim appearance
- Certified slip resistance thanks to its textured tread surface (R10 rating)
- Glow-in-the-dark edge for improved visibility in low light
- High durability and long service life
- Phthalate-free, REACH-compliant and safe for indoor environments




## Main advantages at a glance

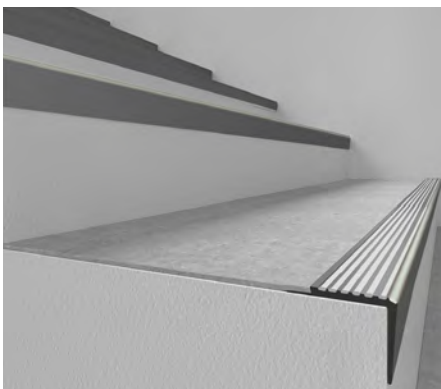

TKNG stair edging profiles are made from a flexible PVC-based polyblend. All materials are REACH-compliant and the profiles are certified to **slip-resistance class R10**.

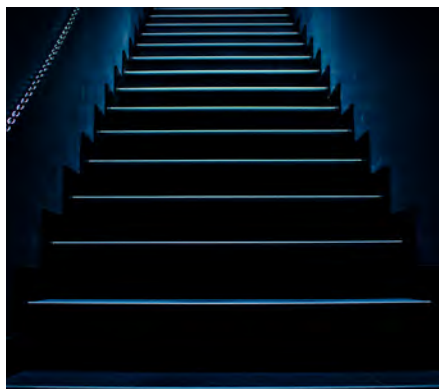

The integrated **glow-in-the-dark edge** improves safety in dark areas and creates an eye-catching accent at night.

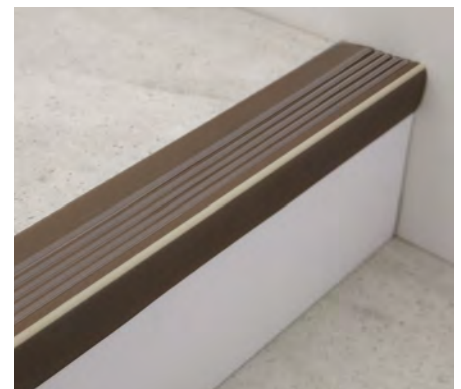


TKNG A-Series also available with **self-adhesive** backing:

- ✓ 3–5× faster installation
- ✓ Strong Remur® adhesive tape by UZIN
- ✓ No priming or additional adhesive required

# Product information overview


## Stair edging profiles „TKNG“

### Colours


			
Base colour of profile	0138 light gray	0146 dark gray	0110 black
Groove colour	0146 dark gray	0138 light gray	0138 light gray
			
Base colour of profile	0110 black	1245 champagne	0146 dark gray
Groove colour	0110 black	0146 dark gray	0146 dark gray
			
Base colour of profile	1160 aluminium		
Groove colour	0146 dark gray		

### Technical data


TKNG A 40

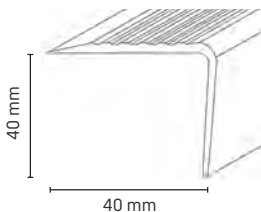


TKNG A 45

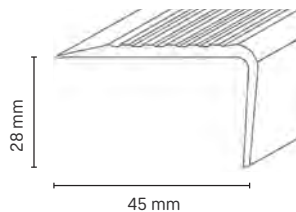


TKNG A 65

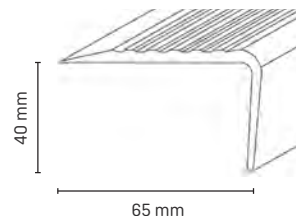

TKNG 2,5 40

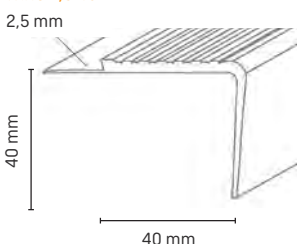

TKNG 3,5 40

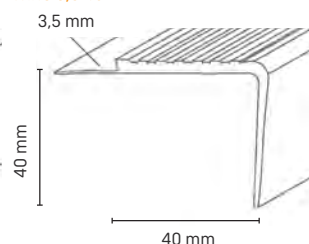

### Installation recommendation



Döllken Skirting scissors



Döllken Notching pliers



Döllken Assembly hammer




Döllken repair angles


### Pack size:

1 pack = 10 × 2,5 m  
(partial packs available)

## Repair angle

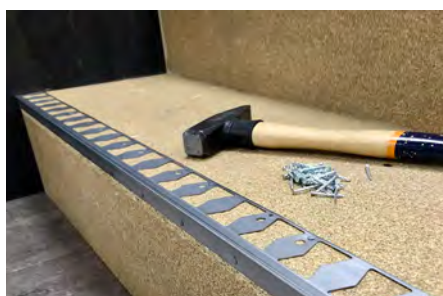

### Technical data

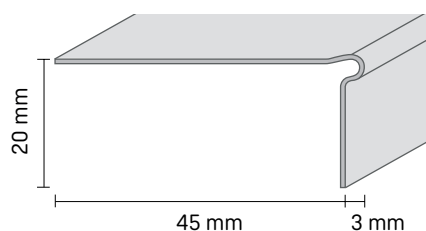

### Pack size:

1 pack = 20 × 1,25 m

Made from high-quality galvanised steel for long-lasting protection.

i

### Installation recommendation



Screws or nails