

S 60 flex life TOP

Solidcore Skirting for all kind of floor coverings



Döllken Weimar's solidcore skirtings are unique in their production technology: co-extrusion. Certified high density pine wood fibre cores are encased in a hard-wearing polyolefin. Döllken solidcore skirtings are very environment-friendly and therefore certified e.g. by GREENGUARD Certification. Very practical and timesaving; all solidcore skirtings can be installed with our system tools.


The key benefits of the S 100 life/
S 60 flex life TOP:

- **Flexible lip seals to the flooring and the wall**
- **Hardwearing surface**
- **High flexibility of the skirting**
- **Mitre tool for notching seamless external corners and ensuring the perfect fit of internal corners**



S 60 flex life Top/ S 100 life

Solidcore Skirting for all kind of floor coverings

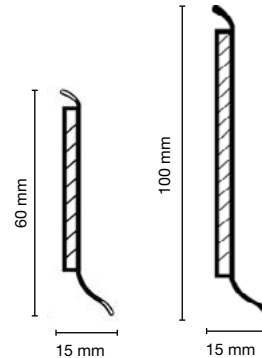

S 60: 1 sales unit = 40 x 2,575 m, S 100: 1 sales unit = 20 x 2,575 m

Specification

- HDF core encased in chlorine-free hard-wearing polyblend based on PP/TPE

Accessories

1 sales unit = 10 pieces,
available in 6 colours:



End caps
left/right



Connectors (S 60 only)

Colours: white, light grey, light beige, grey, black, aluminium metallic

Tools

- Mitre Tool Type 1001
- Measuring Template for easy, precise positioning of the Mitre Tool
- Edge Cutter (Skirting Scissors)

Installation recommendation



Döllken
Notch



Döllken
Hot-melt



Adhesive Tape
UZIN (only S 60)

The chosen fastening system depends on the soundness of the wall structure, which should be checked for appropriate quality and rigidity by the fitter. We recommend UZIN Toptac 35 contact film adhesive, which is perfect for use on the skirting Döllken hotmelt adhesive HKS 18/300. Refer to Döllken installation and maintenance instructions.

Colours S 60 flex life TOP



* also available for S 100 life

DÖLLKEN

W E I M A R

A SURTECO COMPANY