

Döllken Product Information

SL 48 The Perfect Skirting Board System for Laminated or Hard Wood Floors



- Made of chlorine-free hard-wearing polyolefin
- Two large cable ducts
- Flexible top and bottom lip seals for perfect finishes
- Available in many attractive colours and shades
- Matching internal/external corners and end caps
- Consists of base profile and decorative profile
- Concealed and easy fixing
- Decorative profile can be detached at any time, e.g. for cable laying

Profiles for professionals

DÖLLKEN
WEIMAR
A SURTECO COMPANY


Professional Installation System

Döllken SL 48



The chlorine-free SL 48 Skirting Board System by Döllken provides walls with a decorative finish for laminated and other hard wood floors.

Dimensions and accessories

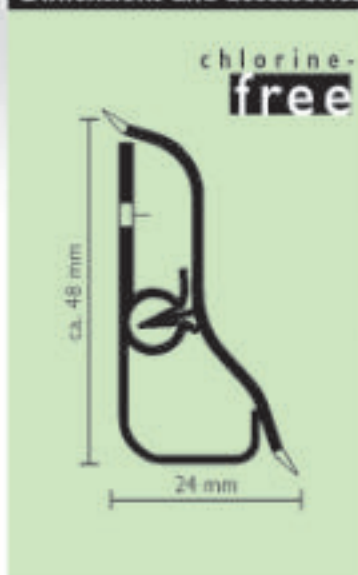

Base profile:

1 sales unit = 20 x 2.5 m (20 each 8'9")

Decorative profile:

1 sales unit = 20 x 2.5 m (20 each 8'9")

Accessories

- 17520 Internal corners 90°
- 17530 External corners 90°
- 17540 Internal corners 135°
- 17550 External corners 135°
- 17560 End caps, left
- 17561 End caps, right
- 17570 Connector, straight



Specification

The chlorine-free SL 48 Skirting Board System consisting of Decorative Profile DP 48 with flexible lip seals, Base Profile GP 20 and accessories, all in chlorine-free hard-wearing polyolefin. With two large cable ducts.

- Height: approx. 48 mm (1,9")
- Edge coverage: approx. 24 mm (1,0")
- Colour: ...
- Product: Döllken SL48 (DP 48 and GP 20)
- Installation: Professional installation in accordance with the manufacturer's instructions. Corners with clips to match the decorative finish. Ends with caps to match the decorative finish.

- Fixing:
 - Base profile:**
 - Nails with suitable dowels (e.g. Fischer NSK)
 - Screws with dowels and round-headed or SPAX screws
 - Use a suitable adhesive in accordance with the manufacturer's instructions
 - Decorative profile:**
 - In accordance with fitting instructions without any visible mounting elements

The chosen fastening system for the base profile depends on the soundness of the wall structure, which should be checked for appropriate quality and rigidity by the fitter. The base profile is cut to size and affixed to the wall on an even floor covering in accordance with the illustrated fitting instructions.

The spacing of nail dowels or screws is approx. 45 cm (1,5') and a maximum of 4 cm (0,8") to wall corners. The decorative profile is clipped onto the base profile without the use of any mounting elements. Use matching clip-on elements for internal and external corners. Ends are sealed with matching end caps.

Shades and colours



* only on request

Distributed by: